

## 34 x 22 mm ICODE Inlay/Label

This inlay meets with ISO15693 standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

|                      |                                                                                                                    |
|----------------------|--------------------------------------------------------------------------------------------------------------------|
| Antenna Size         | 34 x 22 mm                                                                                                         |
| Wet Inlay/Label Size | 37 x 25 mm (customized)                                                                                            |
| Material             | Coated Paper / PET / PP Paper / Fragile Paper                                                                      |
| Working Temp         | -40~+85°C                                                                                                          |
| Storage Temp         | -20~50°C                                                                                                           |
| Storage Humidity     | 20%~90% RH                                                                                                         |
| RFID Standard        | ISO15693                                                                                                           |
| Chip Type            | NXP Icode SLIX/SLIX2/SLIX-S/SLIX-L/SLI/SLI-S                                                                       |
| Read Range           | 0 - 100 cm                                                                                                         |
| Data Storage         | > 10 years                                                                                                         |
| Re-write             | 100000 times                                                                                                       |
| Customization        | Printing LOGO, Barcode, Serial number, Encoding, Designing, etc.                                                   |
| Package              | Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton |
| Application          | IT asset Tracking   Library management<br>Document tracking management   Dangerous goods management                |




**SCIVAS LIMITED**

YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

[www.scivas.com](http://www.scivas.com) Tel: +86-20-87097510

## Dimensions:

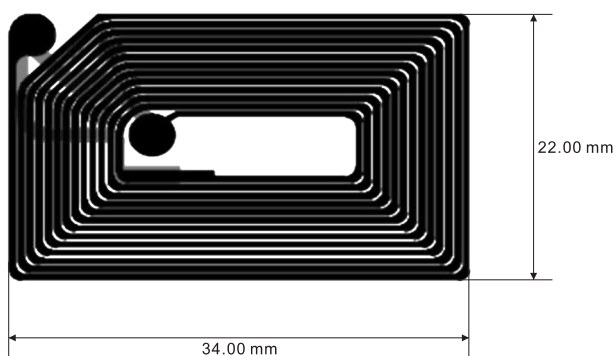

## Application:

